



/N-08 397277 24P

TECHNICAL MEMORANDUM


LOW-SPEED MEASUREMENTS OF STATIC AND OSCILLATORY LATERAL STABILITY DERIVATIVES OF A 1/5-SCALE MODEL OF A

JET-POWERED VERTICAL-ATTITUDE

VTOL RESEARCH AIRPLANE

By Robert E. Shanks and Charles C. Smith, Jr.


Langley Research Center Langley Field, Va.

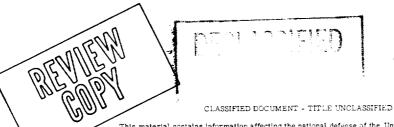

Library NASA-HSFS SEP 21 1959

This material contains information affecting the national defense of the United States within the meaning of the espionage laws, Title 18, U.S.C., Secs. 793 and 794, the transmission or revelation of which in any manner to an unauthorized person is prohibited by law.

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
WASHINGTON



ŧ

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

TECHNICAL MEMORANDUM X-143

LOW-SPEED MEASUREMENTS OF STATIC AND OSCILLATORY LATERAL

STABILITY DERIVATIVES OF A 1/5-SCALE MODEL OF A

JET-POWERED VERTICAL-ATTITUDE

VTOL RESEARCH AIRPLANE*

By Robert E. Shanks and Charles C. Smith, Jr.

ABSTRACT


Force tests of the static and dynamic lateral stability characteristics of a VTOL airplane having a triangular wing mounted high on the fuselage with a triangular vertical tail on top of the wing and no horizontal tail have been made in the Langley free-flight tunnel. The static lateral stability parameters and the rolling, yawing, and sideslipping dynamic stability derivatives are presented without analysis.


INDEX HEADINGS

Stability, Lateral - Static	1.8.1.1.2
Stability, Directional - Static	1.8.1.1.3
Stability, Lateral and Directional - Dynamic	1.8.1.2.2
Damping Derivatives - Stability	1.8.1.2.3

^{*}Title, Unclassified.







NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

TECHNICAL MEMORANDUM X-143

LOW-SPEED MEASUREMENTS OF STATIC AND OSCILLATORY LATERAL STABILITY DERIVATIVES OF A 1/5-SCALE MODEL OF A

JET-POWERED VERTICAL-ATTITUDE

VTOL RESEARCH AIRPLANE*

By Robert E. Shanks and Charles C. Smith, Jr.

SUMMARY

An investigation has been made in the Langley free-flight tunnel to determine the low-speed static lateral stability characteristics and the rolling, yawing, and sideslipping dynamic stability derivatives of a 1/5-scale model of a jet-powered vertical-attitude VTOL research airplane. The results of this investigation are presented herein without analysis.

INTRODUCTION

An investigation has been made to determine the low-speed static lateral stability characteristics and the rolling, yawing, and side-slipping dynamic stability derivatives of a 1/5-scale model of a jet-powered vertical-attitude VTOL research airplane. The model used in this investigation was the flying model used previously in the flight-test investigation discussed in reference 1. The airplane has a modified triangular wing with a modified triangular vertical tail mounted on top of the wing and has no horizontal tail. A small vertical tail was also mounted on each wing tip to help improve the directional stability at low angles of attack. Take-offs and landings with the airplane in a vertical attitude are made from a horizontal wire with a special hook-on attachment on the nose of the airplane. For convenience, however, the airplane also had a tricycle landing gear to permit conventional take-offs from and landings on the ground so that the initial transitions could be performed at a safe altitude.

Title, Unclassified.





The investigation included rolling, yawing, and sideslipping oscillation tests over an angle-of-attack range from 0° to 90° with 0° deflection of all controls. The reduced-frequency parameter was varied from 0.05 to 0.23 in the rolling, yawing, and sideslipping oscillation tests.

DEFINITIONS OF TERMS AND SYMBOLS

All velocities, forces, and moments, with the exception of lift and drag, were measured with respect to the body-axis system originating at the reference center-of-gravity position located at 30.4 percent mean aerodynamic chord. Lift and drag were measured with respect to the wind-axis system. (See fig. 1.) The term "in-phase derivative" used herein refers to any one of the stability derivatives which are based on the forces or moments in phase with the angle of roll, yaw, or sideslip produced in the oscillatory tests. The term "out-of-phase derivative" refers to any one of the stability derivatives which are based on the forces or moments 90° out of phase with the angle of roll, yaw, or sideslip. The derivatives measured in the investigation are summarized in table I. All measurements are reduced to standard coefficient form and are presented in terms of the following symbols:

X,Y,Z	body reference axes
S	wing area, sq ft
ъ	wing span, ft
c	mean aerodynamic chord, ft
v	free-stream velocity, ft/sec
q	free-stream dynamic pressure, lb/sq ft
$\omega = 2\pi f$,	radians/sec
f	frequency of oscillation, cps
k	reduced-frequency parameter, wb/2V
α	angle of attack, deg
β	angle of sideslip, deg or radians
r	yawing velocity, radians/sec
p	rolling velocity, radians/sec

$$\dot{\beta} = \frac{\mathrm{d}\beta}{\mathrm{d}t}$$

$$\dot{r} = \frac{dr}{dt}$$

$$\dot{p} = \frac{dp}{dt}$$

$$M_{\rm X}$$
 rolling moment, ft-lb

$$C_{m}$$
 pitching-moment coefficient, $\frac{M_{Y}}{qS\overline{c}}$

$$c_l$$
 rolling-moment coefficient, $\frac{M_X}{qSb}$

$$c_n$$
 yawing-moment coefficient, $\frac{M_Z}{qSb}$

$$C_{l_{\beta}} = \frac{\partial C_{l}}{\partial \beta}$$
 per radian

$$C_{n_{\beta}} = \frac{\partial C_n}{\partial \beta}$$
 per radian



$$C_{Y_{\beta}} = \frac{\partial C_{Y}}{\partial \beta}$$
 per radian

$$C_L$$
 lift coefficient, $\frac{F_L}{qS}$

$$c_D$$
 drag coefficient, $\frac{F_D}{gS}$

$$C_{\mathbf{Y}}$$
 side-force coefficient, $\frac{F_{\mathbf{Y}}}{qS}$


$$C_{lr} = \frac{\partial c_l}{\partial \frac{rb}{2V}}$$
 $C_{nr} = \frac{\partial c_n}{\partial \frac{rb}{2V}}$ $C_{Yr} = \frac{\partial c_Y}{\partial \frac{rb}{2V}}$


$$C_{lp} = \frac{\partial C_{l}}{\partial \frac{pb}{2V}}$$
 $C_{np} = \frac{\partial C_{n}}{\partial \frac{pb}{2V}}$ $C_{Yp} = \frac{\partial C_{Yp}}{\partial \frac{pb}{2V}}$

$$C_{l\dot{\beta}} = \frac{\partial C_{l}}{\partial \frac{\dot{\beta}b}{2V}} \qquad C_{n\dot{\beta}} = \frac{\partial C_{n}}{\partial \frac{\dot{\beta}b}{2V}} \qquad C_{Y\dot{\beta}} = \frac{\partial C_{Y}}{\partial \frac{\dot{\beta}b}{2V}}$$

$$C_{1\dot{r}} = \frac{\partial C_{1}}{\partial \dot{r}b^{2}} \qquad C_{n\dot{r}} = \frac{\partial C_{n}}{\partial \dot{r}b^{2}} \qquad C_{Y\dot{r}} = \frac{\partial C_{Y}}{\partial \dot{r}b^{2}}$$

$$C_{l\dot{p}} = \frac{\partial c_{l}}{\partial \dot{p}^{2}} \qquad C_{n\dot{p}} = \frac{\partial c_{n}}{\partial c_{n}} \qquad C_{Y\dot{p}} = \frac{\partial c_{Y}}{\partial c_{Y}^{2}}$$





APPARATUS AND MODEL

Conventional static force tests were conducted in the Langley free-flight tunnel with the model sting mounted, and the forces and moments were measured about the body axes by means of a three-component internal strain-gage balance. The rotary and linear oscillation tests were also conducted in the Langley free-flight tunnel. Detailed descriptions of the apparatus and methods used in deriving the data are given in reference 2. A three-view drawing of the model is shown in figure 2, and the dimensional characteristics are given in table II. For all the tests the engine air inlets and exit were open to permit air flow through the model.

TESTS


The static force tests were made over an angle-of-attack range from 0° to 80° for angles of sideslip between $\pm 20^{\circ}$ with all controls at 0° deflection. The oscillation tests were made over an angle-of-attack range from 0° to 90° with all controls at 0° deflection. The reduced-frequency parameter k was varied from 0.05 to 0.23. An oscillation amplitude of $\pm 10^{\circ}$ was used in all the rolling and yawing tests, whereas the amplitude in the sideslipping tests was ± 0.417 foot or $\pm 0.62^{\circ}$ to $\pm 2.85^{\circ}$.

The static and the oscillatory tests were made at a dynamic pressure of 4.11 pounds per square foot, which corresponds to an airspeed of about 60 feet per second at standard sea-level conditions and to a test Reynolds number of 928,000 based on the mean aerodynamic chord of 2.425 feet.

PRESENTATION OF RESULTS

The results of this investigation are presented herein without discussion. The lift, drag, and pitching-moment characteristics of the model with zero deflection of all controls are presented in figure 3 in order that the reader may interpret the lateral stability data of the subsequent figures in terms of lift coefficient and airspeed if he so desires. The static lateral stability characteristics of the model are presented in figures 4 and 5. The variations of the rolling and yawing oscillation derivatives with the reduced-frequency parameter are shown in figures 6 and 7, respectively, for each of the angles of attack tested. The out-of-phase and in-phase derivatives are summarized in figures 8 and 9, respectively, in terms of the variation of the derivatives with angle of attack for constant values of the reduced-frequency parameter. In order






to afford a comparison between the data obtained from the in-phase oscillation tests and the static data, the data of figure 5 multiplied by the appropriate trigonometric function ($\sin\alpha$ for the rolling derivatives and $\cos\alpha$ for the yawing derivatives) have also been presented in figure 9.

In order to obtain the most reliable results in lateral stability calculations, derivatives such as C_{n_r} and $C_{n_{\dot{\beta}}}$ should be used independently in the equations rather than in the combination form $C_{n_r} - C_{n_{\dot{\beta}}}$ cos α . Since $\dot{\beta}$ derivatives were measured in this investigation, it is possible to break up the combination derivatives into their component parts. The values of C_{n_p} , C_{l_p} , C_{n_r} , and C_{l_r} presented in figure 10 were therefore obtained by taking the difference between the $\dot{\beta}$ derivatives and the combination derivatives presented in figure 8.

Langley Research Center,
National Aeronautics and Space Administration,
Langley Field, Va., August 14, 1959.

REFERENCES

- 1. Smith, Charles C., Jr.: Hovering and Transition Flight Tests of a 1/5-Scale Model of a Jet-Powered Vertical-Attitude VTOL Research Airplane. NASA MEMO 10-27-58L, 1958.
- 2. Hewes, Donald E.: Low-Subsonic Measurements of the Static and Oscillatory Lateral Stability Derivatives of a Sweptback-Wing Airplane Configuration at Angles of Attack From -10° to 90°. NASA MEMO 5-20-59L, 1959.



Derivatives	Rolling	Yawing	Sideslipping					
In-phase	$C_{l_{\beta}} \sin \alpha - k^{2}C_{l_{\hat{p}}}$ $C_{n_{\beta}} \sin \alpha - k^{2}C_{n_{\hat{p}}}$ $C_{Y_{\beta}} \sin \alpha - k^{2}C_{Y_{\hat{p}}}$	$C_{l_{\beta}} \cos \alpha + k^{2}C_{l_{\hat{r}}}$ $C_{n_{\beta}} \cos \alpha + k^{2}C_{n_{\hat{r}}}$ $C_{Y_{\beta}} \cos \alpha + k^{2}C_{Y_{\hat{r}}}$	с _{ів} с _{пв} с _{Ув}					
Out-of-phase	$C_{l_p} + C_{l_{\dot{\beta}}} \sin \alpha$ $C_{n_p} + C_{n_{\dot{\beta}}} \sin \alpha$ $C_{Y_p} + C_{Y_{\dot{\beta}}} \sin \alpha$	$C_{l_r} - C_{l_{\dot{\beta}}} \cos \alpha$ $C_{n_r} - C_{n_{\dot{\beta}}} \cos \alpha$ $C_{Y_r} - C_{Y_{\dot{\beta}}} \cos \alpha$	^С і _в ́ С _{пв} ́ СҰв̀					



TABLE II

GEOMETRIC CHARACTERISTICS OF MODEL

Wing (modified trians	gula	ar	pl	an	fo	rr	n):	:														
Sweepback, deg					•															•	•	60
Airfoil section .																				N/	ACA	65A008
Aspect ratio											•	٠.										1.97
Area, sq in				·		_		-		_	_	_	•	_	•	_	_					1.094.4
Span, in.																						
Mean aerodynamic ch																						
Moment arm of roll																						
Incidence, deg	110	د بے ت	LCS	,	T11 (•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	と・・フレ
Dihedral, deg	•	•	• •	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	O
Overall length of mod	lel	, 1	in.					•	•	•		•	•	•	•	•	•	•			•	56.25
Vertical tail (modifi																						
Sweepback, deg	•			•	•	•	•	•	•	•		•	•	•	•	•	•	•		•	•	• • 45
Airfoil section .				•		•	•	•	•	•	•	•	•		•	•	•	•	•	N	ACA	65A012
Aspect ratio	•			•		•		•		•			•	•	•		•		•	•	•	1.76
Area, sq in																						
Span, in																						
Outboard fin:																						
Airfoil section .	•									•	•		•				•		•	N	ACA	65A011
Area, each, sq in.																						
Area, total, sq in																						
Aspect ratio																						3.57
Span, in																						
Root chord, in.																						-
Tip chord, in.																						



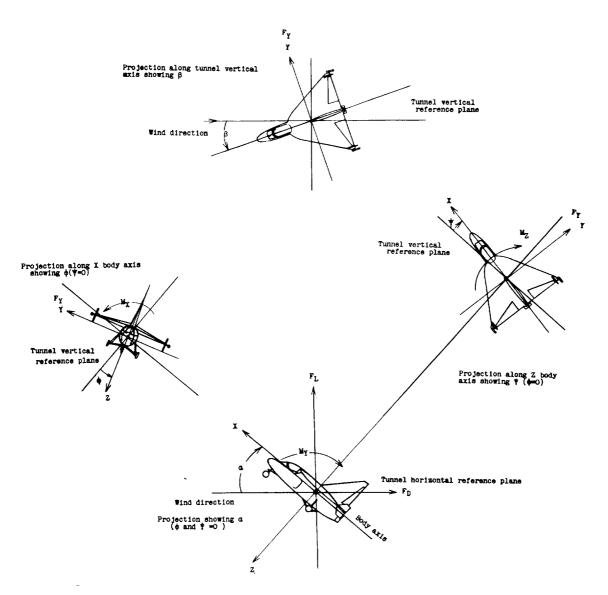



Figure 1.- Body system of axes. Arrows indicate positive directions of moments, forces, and angles. This system of axes is defined as an orthogonal system having the origin at the center of gravity, and the X-axis is in the plane of symmetry and alined with the longitudinal axis of the fuselage. The Z-axis is in the plane of symmetry and perpendicular to the X-axis, and the Y-axis is perpendicular to the plane of symmetry.




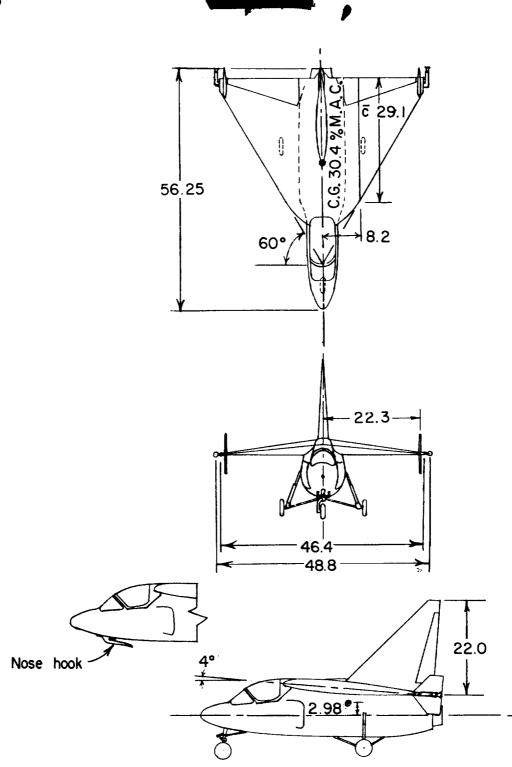


Figure 2.- Three-view sketch of the model used in the tests. All dimensions are in inches unless otherwise indicated.



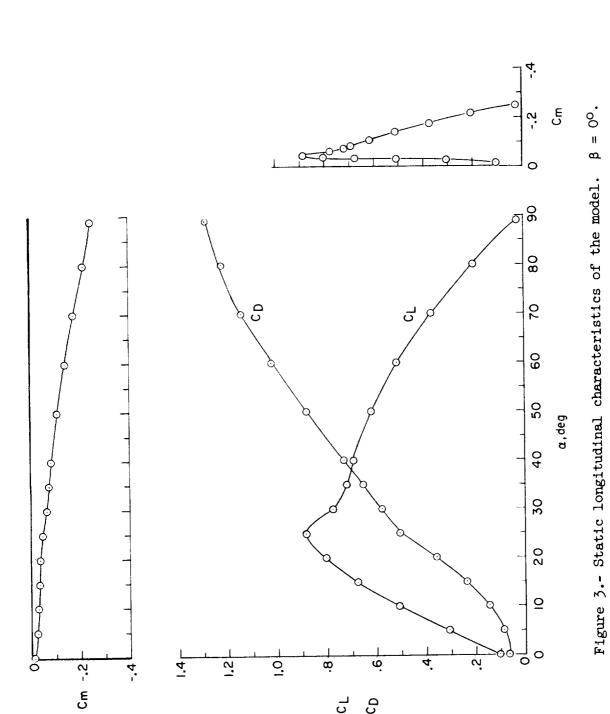

C_C

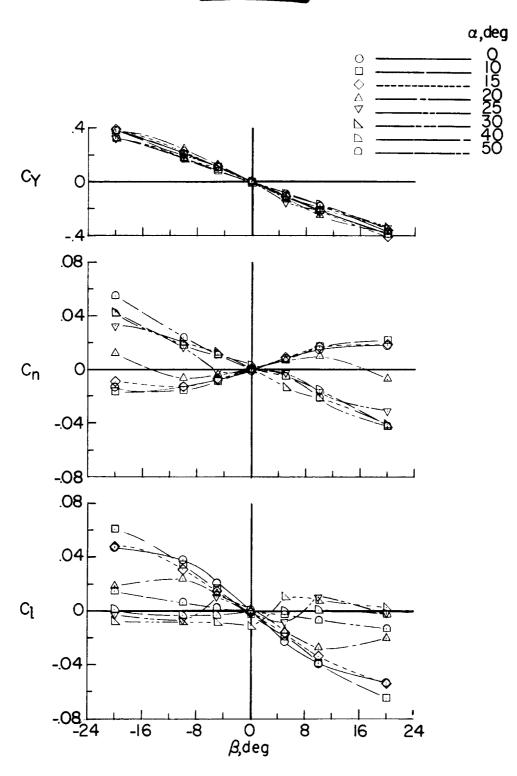


Figure 4.- Static lateral stability characteristics of model.





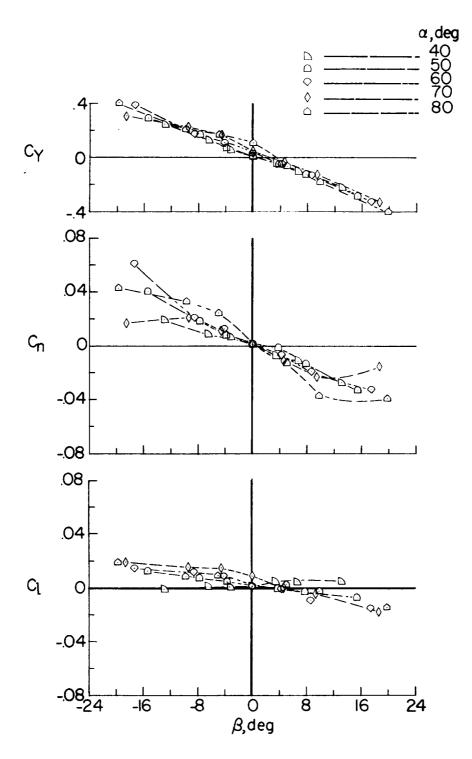


Figure 4.- Concluded.



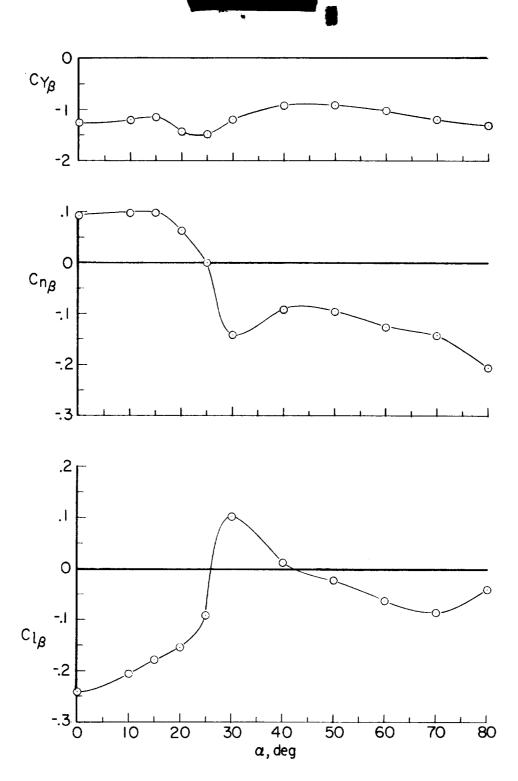


Figure 5.- Variation of static lateral stability derivatives with angle of attack. $\beta = \pm 5^{\circ}$.





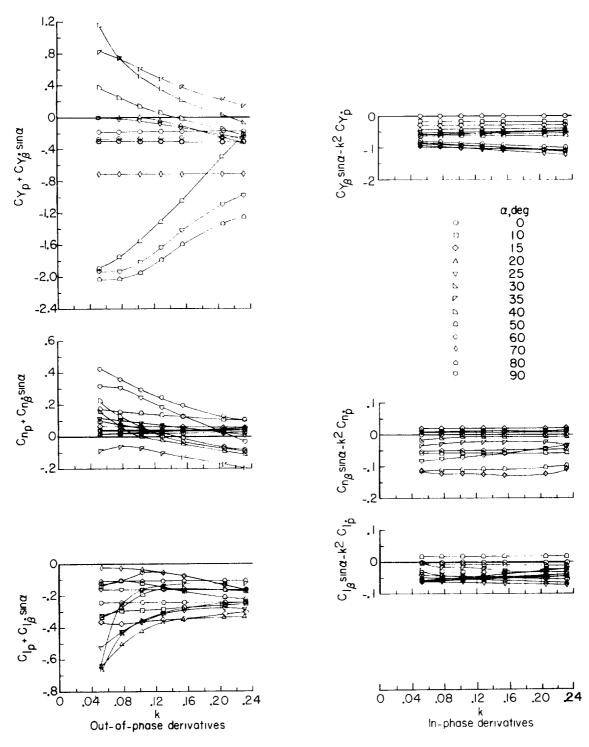


Figure 6.- Variation of rolling oscillation derivatives with reduced-frequency parameter.



.2

0

.04

.08

.12

k Out-of-phase derivatives

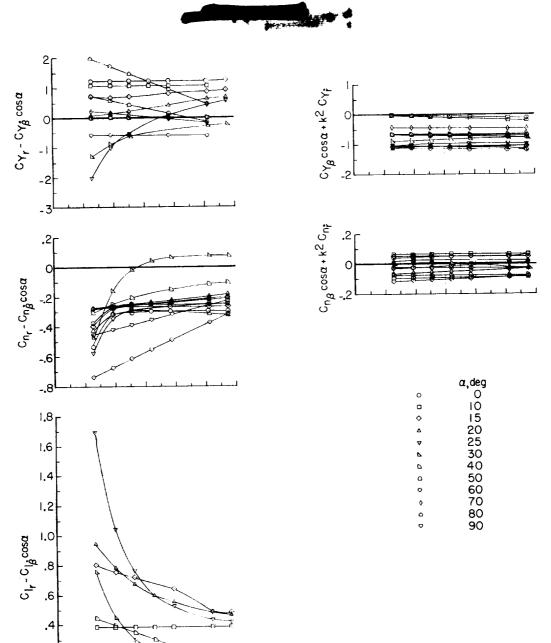


Figure 7.- Variation of yawing oscillation derivatives with reduced-frequency parameter.

.20

.16

.24

 $c_{l_{\boldsymbol{\beta}}}{\cos_{\boldsymbol{\alpha}}}{}_{\boldsymbol{+}}{k^2}c_{l_{\boldsymbol{f}}}$


-.4 0

.04

.08 .12 .16 . k In-phase derivatives

24

.20



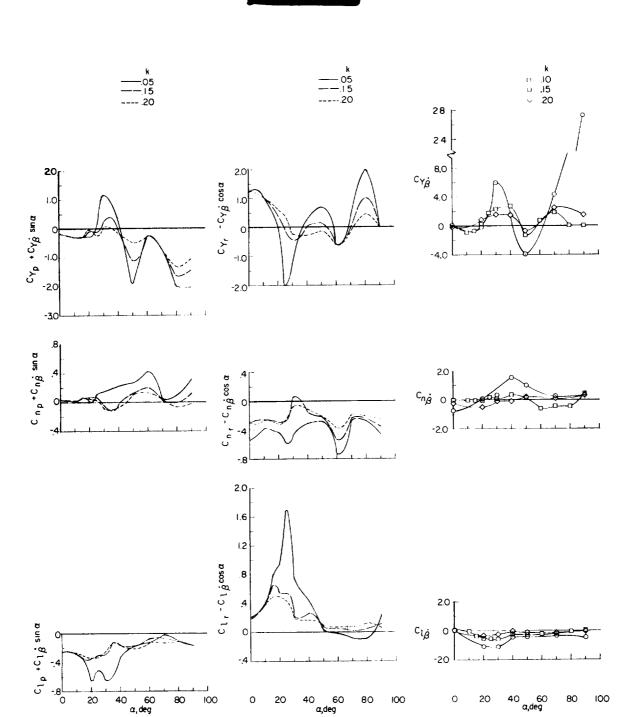


Figure 8.- Variation of out-of-phase derivatives with angle of attack.



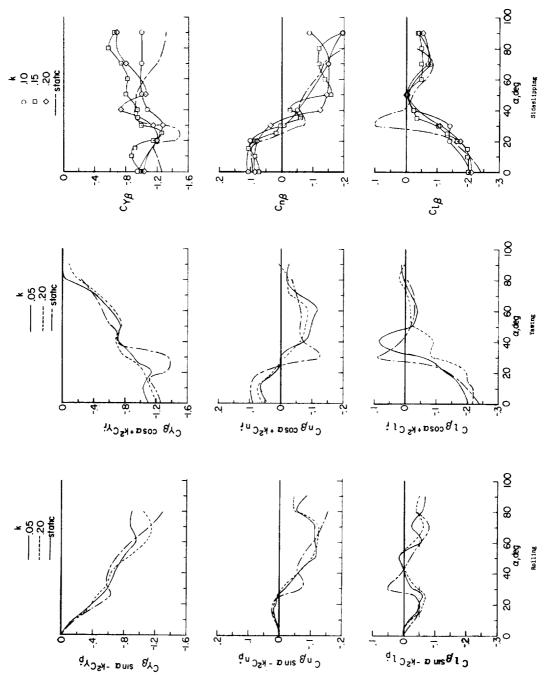


Figure 9.- Variation of in-phase derivatives with angle of attack.





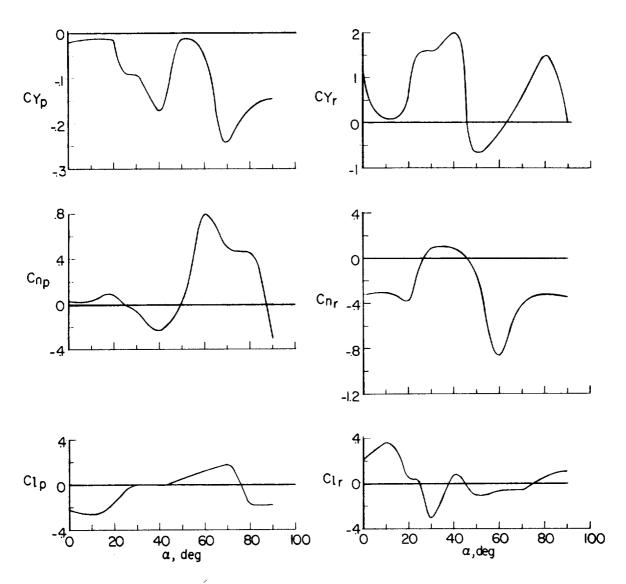


Figure 10.- Variation of rolling and yawing velocity derivatives with angle of attack. Determined from data for k = 0.15 in figure 8.

